


Packing of surface sensitive products.

Wellplast® SOFT

Wellplast® SOFT is a product that is used for packing scratch-sensitive products such as laquered products and sensitive plastic products. The textile Surface is inline heat-laminated. This process eliminates the problem of glue leaking through the textile. The material is stiff and can be used for interlayers, dividers, inserts and boxes. It is produced in several different thicknesses which makes it suitable for both oneway and return packaging solutions. When used the material is fully recyclable.

Packing applications:

- √ Plastic parts
- √ Laquered metal
- √ Return packaging
- √ One way packaging
- √ Interlayers
- √ Protective material

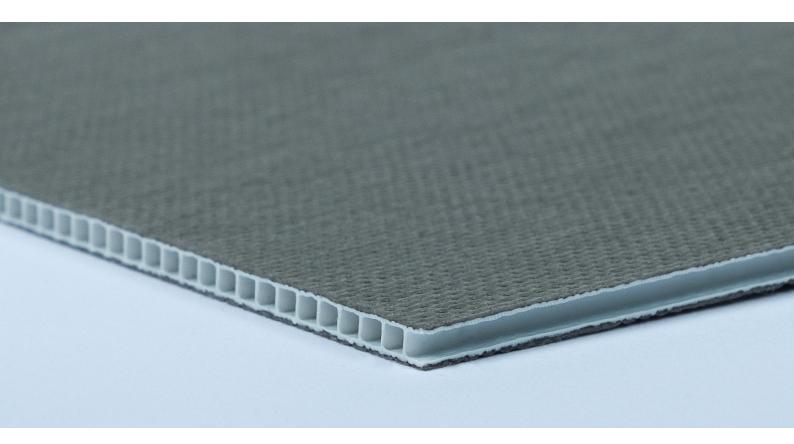







Specifications

	Wellplast® SOFT
Raw material middle layer (fluting):	Polypropylene
Raw material outer layers (liners):	Nonwoven Polypropylene
Size:	Maximum size : 6000*1600mm
Thickness:	2mm-5mm Standard: 2,5mm, 3mm, 3,5mm
Weight:	280g/m²-1500g/m²
Colour:	Standard colours: grey and blue
Printing:	Flexo, screen or UV/digital
Sealing:	Sewing, hot air, hot melt glue
Recycling:	100% recyclable (buy back program)
Waste sorting:	Sort as plastic

Charachteristics



Soft non scratching surface, durable, stiff, moisture proof, low weight, ECO-efficiant.







High stacking strength



Heat laminated surface - No glue

Contact us for more information or prices.



